




Kaptôrama

2024 Export catalogue

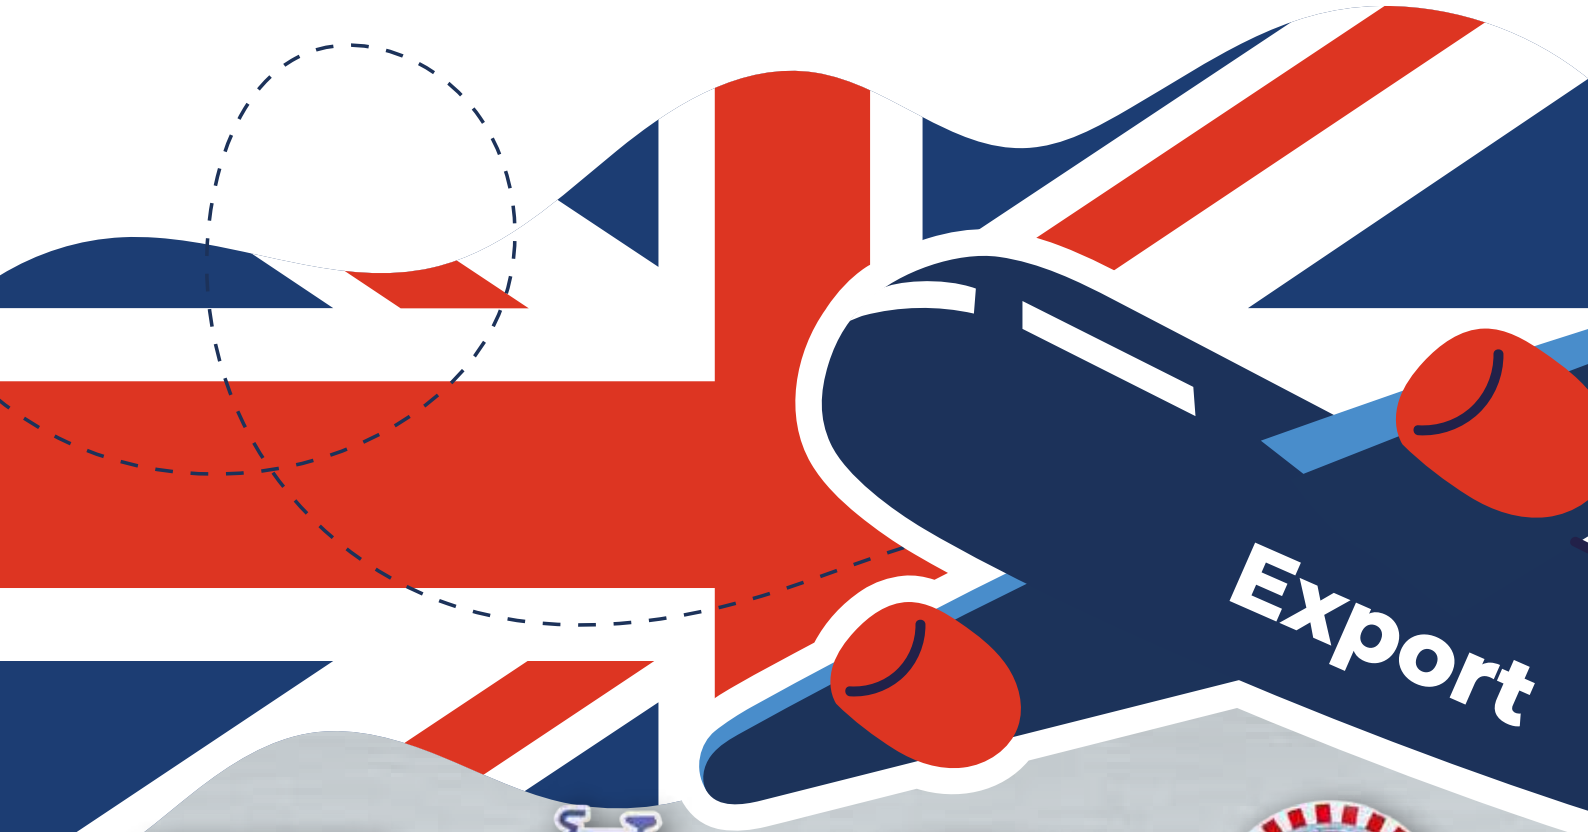

ROAD TRAFFIC



SWEET MOBILITIES



MULTI PUR POSE
INDOOR/OUTDOOR



PANORAMIC MIRRORS



JAfETY AND
PREVENTION



MULTI PUR POSE
INDOOR MIRRORS



SAfETY AND
FULLFULLY CUSTOMISABLE



SAfETY AND
FULLFULLY CUSTOMISABLE



LOGISTIC



INSPECTION



SECURITY SOLUTIONS
AND SAFETY SIGNS



BATHROOMS AND
COMMUNAL AREAS

EDITORIAL

We are delighted to present our Kaptôrama mirrors.

We have been manufacturing convex safety and surveillance mirrors for over 40 years.

With its Kaptôrama brand, SOCOMIX SAS is now the leading French manufacturer of road mirrors. Our ambition is to become a major player in Europe and worldwide.

Because we have mastered all the manufacturing processes and we have a fleet of state-of-the-art machines (thermoforming, cutting workshops, digital printing), we can guarantee high quality, with additional warranty coverage and unlimited customisation possibilities.

This catalogue presents most of the mirrors in our range, but is not exhaustive.

We would like to thank all the dealers who have placed their trust in us since 1983 and extend a warm welcome to newcomers!

*Frédéric Pimpaud
CEO*

*Jean-Michel Hammel
Export Manager*

We also invite you to check out our new products:

- Aluminium flagpoles
- Windsocks and windsock poles
- Advertising sail flags
- Safety signposting



Kaptôrama mirrors are manufactured at our factory in the Loiret department, located between Orléans and Chambord.

We have a dynamic, responsive, 19 person team working in a 11,000-m² technical and logistics facility. In 2023, we produced more than 20,000 mirrors and nearly 1,000 aluminium poles.



Orléans

Chambord

LABELLING OF KAPTÔRAMA MIRRORS

Sample **STANDARD** label for all orders



Sample made-to-order **custom** label



Mirror catalogue No.



Warranty expiry date

Reflector material (Example: stainless steel 10-year warranty)

Dealer address example

Serial number

- Plexi+ 3-year warranty
- Poly+ 6-year warranty
- Polished stainless steel 10-year warranty

All **Kaptôrama mirrors** are supplied with a label indicating a unique serial number and the warranty expiry month. You can have this label customised with your logo and contact details.

HOW TO CHOOSE YOUR MIRROR

ENVIRONMENT

Indoors or outdoors:


- In built-up areas on the public highway or on private roads (residences, car park exit)
- In an industrial or logistics environment, etc.
- Public places: stores, government offices, etc.
- In very specific settings: medical or food laboratory, swimming pool, prison, etc.

The installation location will determine the features of the mirror (e.g., black and white striped frame for the public highway, or red and white for industry) and its manufacture (an indoor mirror does not need protection from cold or bad weather on its back).

SIZE

To ensure good visibility, start by checking the maximum distance between the mirror installation location and the expected location of the observer.

That distance will determine the size of the mirror.
Refer to the tables for the various mirror ranges.

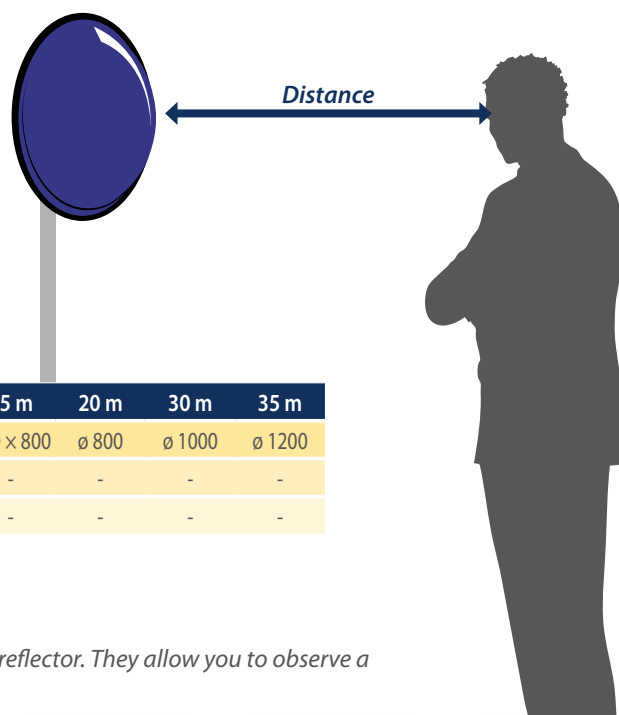


Max. dist.	4 m	6 m	8 m	10 m	12 m	15 m	20 m	30 m	35 m
90° mirrors	ø 300	ø 400	-	400 × 600	ø 600	600 × 800	ø 800	ø 1000	ø 1200
180° mirrors	ø 400	-	ø 600	ø 800	ø 900	-	-	-	-
Hemisphere mirrors	-	ø 600	ø 800	ø 1000	-	-	-	-	-

VISION

Most safety mirrors and surveillance mirrors have a 90° convex reflector. They allow you to observe a wide field of view without excessive deformation of the image.

Mirrors with a 180° panoramic view are used for access control in one or more directions, but with a reduced observation distance.

NOTE: In either case, you must stop and not commit yourself if a pedestrian or vehicle is visible in the reflector, because it is impossible to judge their speed in a reflected image.

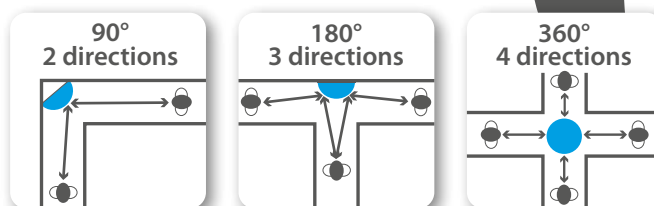

CHOICE OF MATERIAL

We offer four materials with different properties and warranties:

Warranty 3 YEAR ECOCHOK
Virtually unbreakable
Anti-UV treatment

Warranty 3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Warranty 6 YEAR POLY+
Vandal-proof
Damage-proof
Anti-UV treatment

Warranty 10 YEAR INOX POLI
Special model for coastal and high mountain regions
Vandal-proof – Damage-proof


N.B.: Our warranty does not cover the effects of mishandling, whether deliberate or not, the consequences of vandalism or poor maintenance, or the consequences of installing the equipment in coastal areas (do not scrub when cleaning).



**ROAD MIRRORS, PANORAMIC MIRRORS,
AND MIRRORS WITH MESSAGES** 07



**INDOOR / OUTDOOR MULTIPURPOSE
MIRRORS** 21

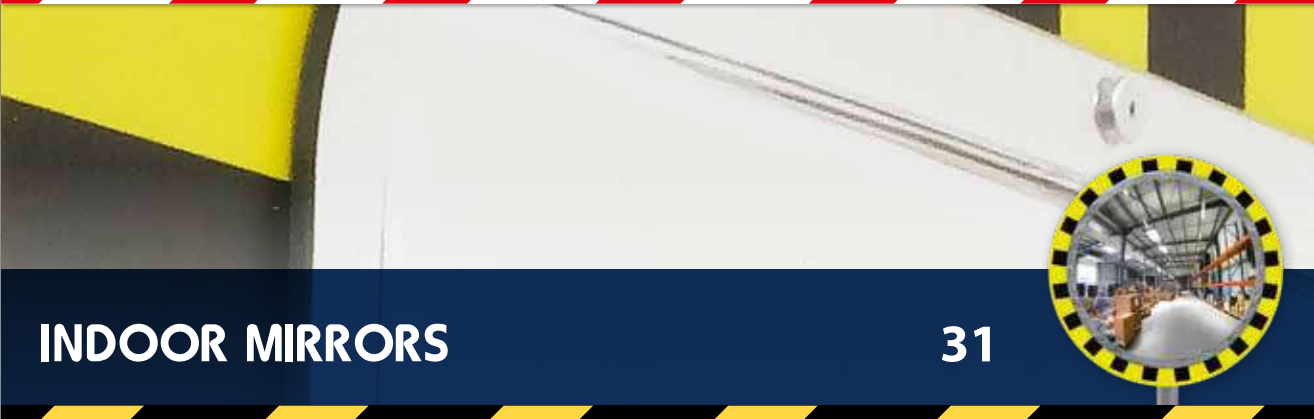

INDOOR MIRRORS 31



SAFETY AND SIGNPOSTING SOLUTIONS 45



**UNBREAKABLE MIRRORS FOR WASHROOMS
AND AQUATIC FACILITIES** 51



MACHINING



THERMOFORMING



PRINTING



ASSEMBLY



PACKAGING

ROAD MIRRORS, PANORAMIC MIRRORS, AND MIRRORS WITH MESSAGES

Economy range

3-year warranty – 90° view P. 08



Classic range

3/6-year warranty – 90° view P. 09



Classic stainless steel range

10-year warranty – 90° view P. 10



Classic anti-icing stainless steel range

10-year warranty – 90° view P. 11



Stainless steel wood frame

10-year warranty – 90° view P. 12



Anti-icing stainless steel wood frame

10-year warranty – 90° view P. 13



Citymir range Soft mobility

3-year warranty – 90° and 180° view P. 14



Citymir range Soft mobility cycle paths

3-year warranty – 90° view P. 15



Panoramic range

3/6-year warranty – 180° view P. 16




Semi-panoramic range

3/6-year warranty – 180° view P. 17



Message range

3-year warranty – 90° view P. 18



Customisable range

3-year warranty – 90° view P. 19



ROAD MIRRORS


90° VIEW – 2-DIRECTIONAL MONITORING

ECONOMY RANGE

ECOCHOK: 3-year warranty

USES

- Dangerous junctions and crossings on private roads.
- Safety in indoor and outdoor storage areas.
- Traffic control for heavy goods vehicles and handling equipment.
- Control stations and factory exits.



Frame: white brushed ABS.

Seal: highly robust, white silicone.

Fixings: included in the price, this hardware can be used for mounting on round posts with a cross-section of dimensions 60 to 76 mm.

Fixings for a post of diameter 60 to 76 mm inclusive

INFO How to choose the right mirror
See page 04

Warranty 3 YEAR ECOCHOK

Virtually unbreakable Anti-UV treatment



Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	Ø 700 mm	12 meters
Ø 800 mm	Ø 900 mm	20 meters
400 × 600 mm	500 × 700 mm	10 meters
600 × 800 mm	700 × 900 mm	20 meters

Catalogue No.	Unit price (excl. tax)
MIRUS 6001	
MIRUS 8001	
MIRUS 4601	
MIRUS 6801	

Accessories

Galvanised steel mounting post, diameter 60 mm, height 3.5 m	Catalogue No. P11
Galvanised steel mounting post, diameter 76 mm, height 4 m	Catalogue No. P19
Wall bracket	Catalogue No. PLATJMZ

CLASSIC RANGE


with universal fixing

PLEXI+ 3-year warranty

or Poly+ 6-year warranty

USES

- Dangerous junctions and crossings on private roads.
- Safety in indoor and outdoor storage areas.
- Traffic control for heavy goods vehicles and handling equipment.
- Control stations and factory exits.



Universal fixing included



Frame: the vandal-proof frame is made of 10-mm rigid expanded PVC. The red chequerboard is printed using digital technology with UV inks.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

NEW
Available with
in **BLACK** and **YELLOW**

Warranty 3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Warranty 6 YEAR POLY+
Vandal-proof
Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)	Catalogue No.	Unit price (excl. tax)
Ø 400 mm	Ø 588 mm	6 meters	BO 407		BO 409	
Ø 600 mm	Ø 788 mm	12 meters	BO 607		BO 609	
Ø 800 mm	Ø 988 mm	20 meters	BO 807		BO 809	
450 × 600 mm	638 × 788 mm	10 meters	SO 4607		SO 4609	
600 × 800 mm	788 × 988 mm	20 meters	SO 6807		SO 6809	



Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for traffic mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

STAINLESS STEEL ROAD MIRRORS

90° VIEW – 2-DIRECTIONAL MONITORING


CLASSIC STAINLESS STEEL RANGE

*with universal fixing
and steel reflector*

*Polished stainless steel
10-year warranty*

USES

- Dangerous junctions and crossings on private roads.
- Safety in indoor and outdoor storage areas.
- Traffic control for heavy goods vehicles and handling equipment.
- Control stations and factory exits.



*Universal fixing included
(applies to the mirrors on these
two pages)*



**How to
choose the
right mirror**
See page 04

NEW
Available with
in **BLACK** and **YELLOW**



Fixing on post



Wall fixing



Frame: the vandal-proof frame is made of rigid expanded PVC. The red chequerboard pattern is printed using digital technology with UV inks.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	Ø 788 mm	12 metres	BO 608	
Ø 800 mm	Ø 988 mm	20 metres	BO 808	
450 × 600 mm	638 × 788 mm	10 metres	SO 4608	
600 × 800 mm	788 × 988 mm	20 metres	SO 6808	
800 × 1000 mm	988 × 1188 mm	35 metres	SO 81008	

Warranty 10 YEAR INOX POLI

Special model for coastal and high mountain regions
Vandal-proof – Damage-proof

Fork



Extension



Accessories


- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for traffic mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

CLASSIC STAINLESS STEEL RANGE

with universal fixing and steel reflector
Polished stainless steel 10-year warranty and autonomous

USES

- Dangerous junctions and crossings on private roads.
- Safety in indoor and outdoor storage areas.
- Traffic control for heavy goods vehicles and handling equipment.
- Control stations and factory exits.



NEW
 Available with
 in **BLACK** and **YELLOW**

OPERATING PRINCIPLE OF THE ANTI-ICING AND DEMISTING SYSTEM

A system located behind the stainless steel mirror, held in place by a galvanised steel back, allows the mirror to use heat stored during the day to prevent misting and frost, ensuring clear vision at all times. The anti-icing system is guaranteed to work at temperatures above -20°C .

The anti-icing system comes with a 6-year warranty; the stainless steel reflector comes with a 10-year warranty.

Frame: the vandal-proof frame is made of rigid expanded PVC. The red chequerboard pattern is printed using digital technology with UV inks.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	Ø 788 mm	12 metres
Ø 800 mm	Ø 988 mm	20 metres
450 × 600 mm	638 × 788 mm	10 metres
600 × 800 mm	788 × 988 mm	20 metres
800 × 1000 mm	988 × 1188 mm	35 metres

Warranty **10** YEAR **INOX POLI**
 ANTI-ICING SYSTEM

Special model for coastal and high mountain regions
 Vandal-proof – Damage-proof

Catalogue No.	Unit price (excl. tax)
BO 608 AG	
BO 808 AG	
SO 4608 AG	
SO 6808 AG	
SO 81008 AG	



Fork



Extension

Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for traffic mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR


**With universal fixing
and steel reflector
POLISHED STAINLESS STEEL 10-
year warranty**

USES

- Dangerous junctions and crossroads in built-up areas.
- Entrances to garages, buildings, and courtyards from public highways.
- Exits from fire stations, hospitals, schools, etc.
- Enhanced safety for pedestrian crossings.



INFO How to choose the right mirror
See page 04



LARCHWOOD FRAME

- Durable: rotproof wood
- Robust: resistant to bad weather, insects, and fungal attack
- Non-polluting: requires no treatment
- Excellent fire resistance

**Universal fixing included
(applies to the mirrors on these two pages)**



Frame: made of three-ply larchwood, rotproof. The red and white chequerboard pattern is printed using digital technology with UV inks.


Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	900 × 900 mm	12 meters
450 × 600 mm	675 × 900 mm	10 meters
600 × 800 mm	900 × 1200 mm	15 meters
800 × 1000 mm	998 × 1188 mm	20 meters




**Special model for coastal and high mountain regions
Vandal-proof – Damage-proof**

Catalogue No.	Unit price (excl. tax)
BO 600-JURA	
SO 4608-JURA	
SO 6808-JURA	
SO 81008 JURA	

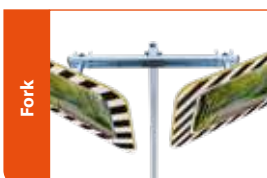

Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR



USES

- Dangerous crossroads and junctions in built-up areas.
- Entrances to garages, buildings, and courtyards from public highways.
- Exits from fire stations, hospitals, schools, etc.
- Enhanced safety for pedestrian crossings.

REGULATIONS

Location of mirrors in built-up areas (excerpt)

French Order dated 21/09/1981 sets out the conditions in which mirrors may be used.

In built-up areas, mirrors may be used subject to the following conditions being met:

- rules of priority being applied, with the requirement of a STOP command for users,
- the distance between the stop line and the mirror must not exceed 15 metres,
- a speed limit on the priority road of 50 km/h or less,
- the mirror must be located at a height of over 2.30 m,
- most of the traffic on the road on which the aforementioned STOP command is located must be local.



Polished stainless steel 10-year warranty and autonomous anti-icing system

OPERATING PRINCIPLE OF THE ANTI-ICING AND DEMISTING SYSTEM

A system located behind the stainless steel mirror, held in place by a galvanised steel back, allows the mirror to use heat stored during the day to prevent misting and frost, ensuring clear vision at all times. The anti-icing system is guaranteed to work at temperatures above -20°C .

The anti-icing system comes with a 6-year warranty; the stainless steel reflector comes with a 10-year warranty.



Frame: made of three-ply larchwood, rotproof. The red and white chequerboard pattern is printed using digital technology with UV inks.


Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	900 × 900 mm	12 meters
450 × 600 mm	675 × 900 mm	10 meters
600 × 800 mm	900 × 1200 mm	15 meters



Special model for coastal and high mountain regions
Vandal-proof – Damage-proof

Catalogue No.	Unit price (excl. tax)
BO 6008-JURA AG	
SO 4608-JURA AG	
SO 6808-JURA AG	

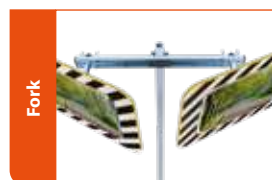

Fork



Extension

Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR



CITYMIR 3007 RB06

Universal fixing included



Fixing on post




Wall fixing

USES

- Garage exits, underground car park exits, gates
- Safety for vehicle and pedestrian exits

Frame: the vandal-proof frame is made of rigid expanded PVC. The black stripes are printed in compliance with the order dated 21/09/1981.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.



Warranty **3** YEAR **PLEXI+**

Unbreakable
Damage-proof – Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
Ø 300 mm	450 x 450 mm	CITYMIR 3007 RB06	



USES


- Garage exits, underground car park exits, gates
- Safety for vehicle and pedestrian exits




Warranty **6** YEAR **POLY+**

Vandal-proof – Damage-proof – Anti-UV treatment

Mirror dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
½ Ø 340 mm	CITYMIR 3009-180	
½ Ø 440 mm	CITYMIR 4009-180	



Two fixing systems included




Back: rigid expanded PVC (new design).

Fixings: included in the price; used for wall mounting via the brackets or drill holes.



USES

- Cycle path junctions
- Car par exits onto cycle paths



Frame: the vandal-proof frame is made of rigid expanded PVC. We can create any type of message or cutout. Ask your dealer.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Warranty
3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Universal fixing included



Mirror dimensions (in mm)	Frame dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
Ø 400 mm	833 x 868 mm	CITYMIR 4007 V	




Frame: durable, made of three-ply larchwood, rotproof. We can create any type of message or cutout. Ask your dealer.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.



Universal fixing included



Warranty
3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
Ø 400 mm	880 x 718 mm	CITYMIR 4007 V-JURA	

TRAFFIC CONTROL MIRRORS FOR INDUSTRY AND

180° VIEW – 3-DIRECTIONAL MONITORING

CLASSIC RANGE



with universal fixing

PLEXI+ 3-year warranty

or Poly+ 6-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.

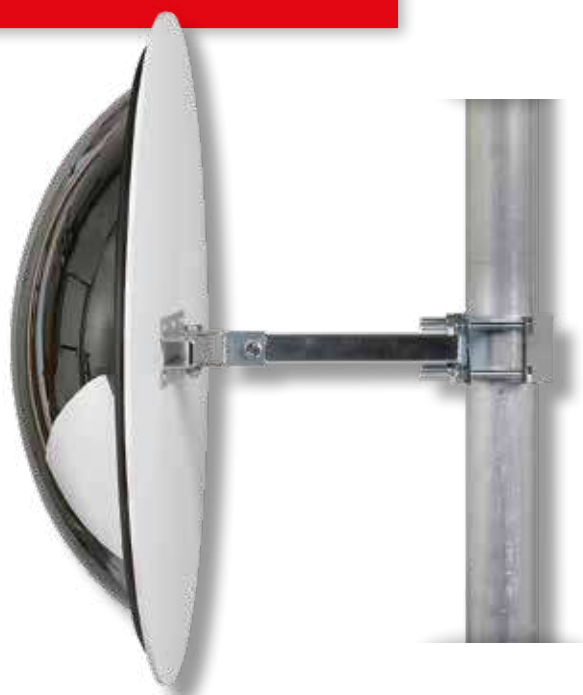

Universal fixing included



Wall fixing

Frame: the vandal-proof frame is made of rigid expanded PVC. The red chequerboard pattern is printed using digital technology with UV inks.



Fixing on post

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

NEW
Available with
in **BLACK** and **YELLOW**

Warranty **3** YEAR **PLEXI+**

Unbreakable
Damage-proof
Anti-UV treatment

Warranty **6** YEAR **POLY+**

Vandal-proof
Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 400 mm	Ø 588 mm	6 meters
Ø 600 mm	Ø 788 mm	8 meters
Ø 800 mm	Ø 988 mm	10 meters
Ø 900 mm	Ø 1088 mm	12 meters

Catalogue No.	Unit price (excl. tax)
PANO 407	
PANO 607	
PANO 807	
PANO 907	

Catalogue No.	Unit price (excl. tax)
PANO 409	
PANO 609	
PANO 809	
PANO 909	



Fork



Extension

Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

CLASSIC RANGE


with universal fixing

PLEXI+ 3-year warranty

or Poly+ 6-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



INFO
How to choose the right mirror
See page 04

Universal fixing included



Frame: made of 10-mm thick rigid expanded PVC. The red chequerboard pattern is printed using digital technology with UV inks.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

NEW
Available with
in **BLACK** and **YELLOW**

Warranty 3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Warranty 6 YEAR POLY+
Vandal-proof
Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
½ Ø 400 mm	½ Ø 588 mm	6 meters
½ Ø 600 mm	½ Ø 788 mm	8 meters
½ Ø 800 mm	½ Ø 988 mm	10 meters
½ Ø 900 mm	½ Ø 1088 mm	12 meters

Catalogue No.	Unit price (excl. tax)
MIPANO 407	
MIPANO 607	
MIPANO 807	
MIPANO 907	

Catalogue No.	Unit price (excl. tax)
MIPANO 409	
MIPANO 609	
MIPANO 809	
MIPANO 909	



Accessories


- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

MIRRORS WITH SAFETY AND PREVENTION MESSAGES

90° VIEW – 2-DIRECTIONAL MONITORING

Discover INFOMIR, the mirror with a safety message, for greater safety on private roads.

INFOMIR is available with standard messages or the message of your choice.



Plexi+ 3-year warranty



Universal fixing included



Frame: the vandal-proof frame is made of rigid expanded PVC. Digitally printed stripes and text.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Warranty
3 YEAR PLEXI+
Virtually unbreakable
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	900 × 1200 mm	12 meters	INFOMIR 6007-001 "DANGER!"	
Ø 600 mm	900 × 1200 mm	12 meters	INFOMIR 6007-002 "SPEED LIMITE"	
Ø 600 mm	900 × 1200 mm	12 meters	INFOMIR 6007-003 "GIVE WAY TO RIGHT"	
Ø 600 mm	900 × 1200 mm	12 meters	INFOMIR 6007-004 "STOP"	
Ø 600 mm	900 × 1200 mm	12 meters	INFOMIR 6007-PERSO "YOUR MESSAGE"	





Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

Discover PERSONIMIR, the custom mirror.

PERSONIMIR is fully customisable, and can also improve safety as well as visibility.

Plexi+ 3-year warranty

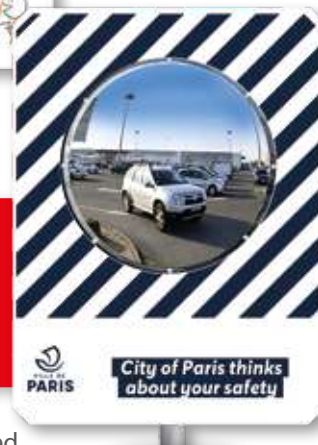

Universal fixing included



TECHNICAL DATA

Simply provide us with a mock-up and vector files. You will receive a proof within 48 hours.

Frame: the vandal-proof frame is made of rigid expanded PVC. Digitally printed stripes and text.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Warranty 3 YEAR PLEXI+

Virtually unbreakable
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	900 x 1200 mm	12 metres	PERSONIMIR 6007 – Custom mirror	<div style="border: 1px solid black; padding: 2px; display: inline-block;">Vectorised logo supplied by you</div>
-	-	-	00010 – Data processing fee	
-	-	-	00011 – Creation fee	



Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR



MACHINING



THERMOFORMING



ASSEMBLY



PACKAGING

INDOOR / OUTDOOR MULTIPURPOSE MIRRORS

Economy range

3-year warranty – 90° view P. 22



Classic range

3/6-year warranty – 90° view P. 23



Classic stainless steel range

10-year warranty – 90° view P. 24



Classic anti-icing stainless steel range

10-year warranty – 90° view P. 25



Jura wood frame

10-year warranty – 90° view P. 26



Anti-icing Jura wood frame

10-year warranty – 90° view P. 27



Classic panoramic range

3/6-year warranty – 180° view P. 28



Classic panoramic range

3/6-year warranty – 180° view P. 29



INDOOR / OUTDOOR MULTIPURPOSE MIRRORS


90° VIEW – 2-DIRECTIONAL MONITORING

ECONOMY RANGE

PMMA 1-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



How to choose the right mirror
See page 04



Wall fixing

Back: black ABS.

Reflector: virtually unbreakable acrylic (PMMA). Anti-UV treatment – 1-year warranty.

Fixings: reinforced steel wall fixing. Swivel adjustment, hardware included.

Warranty
1 YEAR
PMMA

Virtually unbreakable
Anti-UV treatment


Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 300 mm	4 meters	Ecomirpark 307	
Ø 600 mm	12 meters	Ecomirpark 607	

CLASSIC RANGE

with universal fixing
PLEXI+ 3-year warranty
or Poly+ 6-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



Universal fixing included



Wall fixing

Back: galvanised steel for circular mirrors, 10-mm rigid expanded PVC for rectangular mirrors.

Seal: black PVC reinforced with steel staples for circular mirrors. The mirror is held securely.



Fixing on post

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 300 mm	-	4 meters
Ø 400 mm	-	6 meters
Ø 600 mm	-	12 meters
Ø 800 mm	-	20 meters
450 × 600 mm	533 × 688 mm	10 meters
600 × 800 mm	696 × 895 mm	20 meters

Warranty 3 YEAR PLEXI+
 Unbreakable
 Damage-proof
 Anti-UV treatment

Warranty 6 YEAR POLY+
 Vandal-proof
 Damage-proof
 Anti-UV treatment

Catalogue No.	Unit price (excl. tax)	Catalogue No.	Unit price (excl. tax)
JPAG 307		JPAG 309	
JPAG 407		JPAG 409	
JPAG 607		JPAG 609	
JPAG 807		JPAG 809	
SL 4607		SL 4609	
SL 6807		SL 6809	



Fork



Extension

Accessories

- Galvanised steel mounting post, diameter 60 mm, height 3.5 m Catalogue No. P11
- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

INDOOR / OUTDOOR MULTIPURPOSE MIRRORS



90° VIEW – 2-DIRECTIONAL MONITORING

CLASSIC STAINLESS STEEL RANGE

with universal fixing
and steel reflector
POLISHED STAINLESS STEEL
10-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.

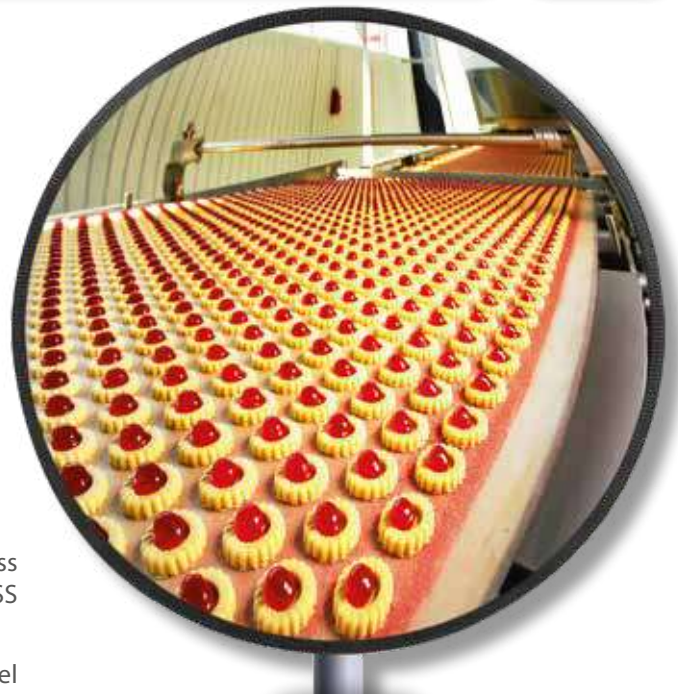

Back: galvanised steel or stainless steel for the new "ALL STAINLESS STEEL" versions.

Seal: PVC reinforced with steel staples for the standard range. Stainless steel rivets for the "ALL STAINLESS STEEL" range (no plastic seals).

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall. The fixing is completely made of stainless steel for the "ALL STAINLESS STEEL" versions.

Universal fixing included



Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	12 metres
Ø 800 mm	20 metres
450 × 600 mm	10 metres
600 × 800 mm	20 metres
800 × 1000 mm	35 metres

INOXTI

Complete stainless steel
Complies with food industry requirements

Warranty **10** YEAR
INOX POLI STANDARD

Special model for coastal and high mountain regions
Vandal-proof – Damage-proof

Catalogue No.	Unit price (excl. tax)
JPAG 608	
JPAG 808	
SL 4608	
SL 6808	
SL 81008	

Warranty **10** YEAR
INOX POLI ALL STAINLESS STEEL

Stainless steel reflector + Stainless steel back + Stainless steel hardware

Catalogue No.	Unit price (excl. tax)
JPAG 608 TI	
JPAG 808 TI	
SL 4608 TI	
SL 6808 TI	
SL 81008 TI	



Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

CLASSIC STAINLESS STEEL RANGE


with universal fixing

Special version for coastal regions, high mountains, and extreme conditions with steel reflector

Polished stainless steel 10-year warranty and autonomous anti-icing system

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



OPERATING PRINCIPLE OF THE ANTI-ICING AND DEMISTING SYSTEM

A system located behind the stainless steel mirror, held in place by a galvanised steel back, allows the mirror to use heat stored during the day to prevent misting and frost, ensuring clear vision at all times. The anti-icing system is guaranteed to work at temperatures above -20°C .

The anti-icing system comes with a 6-year warranty; the stainless steel reflector comes with a 10-year warranty.



INFO How to choose the right mirror
See page 04

Universal fixings included



Wall fixing



Fixing on post

Back: galvanised steel.

Seal: black PVC reinforced with steel staples. The mirror is held securely.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	-	12 meters
Ø 800 mm	-	20 meters
450 × 600 mm	-	10 meters
600 × 800 mm	-	20 meters
800 × 1000 mm	-	35 meters

Warranty 10 YEAR INOX POLI ANTI-ICING SYSTEM
Special model for coastal and high mountain regions
Vandal-proof – Damage-proof

Catalogue No.	Unit price (excl. tax)
JPAG 608 AG	
JPAG 808 AG	
SL 4608 AG	
SL 6808 AG	
SL 81008 AG	



Fork



Extension


Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

**With universal fixing
and steel reflector
POLISHED STAINLESS STEEL
10-year warranty**

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.



INFO **How to choose the right mirror**
See page 04

LARCHWOOD FRAME

- Durable: rotproof wood
- Robust: resistant to bad weather, insects, and fungal attack
- Non-polluting: requires no treatment
- Excellent fire resistance

Universal fixing included



Frame: vandal-proof, three-ply larchwood construction.


Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	Ø 660 mm	12 meters
450 × 600 mm	563 × 718 mm	10 meters
600 × 800 mm	736 × 935 mm	20 meters



Special model for coastal and high mountain regions
Vandal-proof – Damage-proof

Catalogue No.	Unit price (excl. tax)
JPAG 608-JURA	
SL 4608-JURA	
SL 6808-JURA	

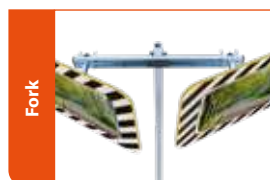


Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

**Polished stainless steel
10-year warranty
and autonomous
anti-icing system**

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.



OPERATING PRINCIPLE OF THE ANTI-ICING AND DEMISTING SYSTEM

A system located behind the stainless steel mirror, held in place by a galvanised steel back, allows the mirror to use heat stored during the day to prevent misting and frost, ensuring clear vision at all times. The anti-icing system is guaranteed to work at temperatures above -20°C .

The anti-icing system comes with a 6-year warranty; the stainless steel reflector comes with a 10-year warranty.

Universal fixing included



Frame: vandal-proof, three-ply larchwood construction.


Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	Ø 660 mm	12 meters
450 × 600 mm	563 × 718 mm	10 meters
600 × 800 mm	736 × 935 mm	15 meters



**Special model for coastal and high mountain regions
Vandal-proof – Damage-proof**

Catalogue No.	Unit price (excl. tax)
JPAG 608 AG-JURA	
SL 4608 AG-JURA	
SL 6808 AG-JURA	

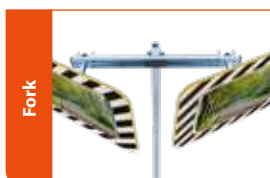

Accessories

- Galvanised steel mounting post, diameter 76 mm, height 4 m² Catalogue No. P19
- Fixing extension for road mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

INDOOR / OUTDOOR MULTIPURPOSE MIRRORS

180° VIEW – 3-DIRECTIONAL MONITORING

CLASSIC RANGE

PLEXI+ 3-year warranty
or **Poly+ 6-year warranty**

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



Universal fixing included



INFO How to choose the right mirror
See page 04

Back: galvanised steel.

Seal: black PVC reinforced with steel staples. The mirror is held securely.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Warranty 3 YEAR PLEXI+

Unbreakable
Damage-proof
Anti-UV treatment

Warranty 6 YEAR POLY+

Vandal-proof
Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Overall dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)	Catalogue No.	Unit price (excl. tax)
Ø 400 mm	Ø 440 mm	6 meters	CHATEL 407		CHATEL 409	
Ø 600 mm	Ø 640 mm	8 meters	CHATEL 607		CHATEL 609	
Ø 800 mm	Ø 840 mm	10 meters	CHATEL 807		CHATEL 809	
Ø 900 mm	Ø 940 mm	12 meters	CHATEL 907		CHATEL 909	



Accessories


- Galvanised steel mounting post, diameter 60 mm, height 3.5 m Catalogue No. P11
- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

CLASSIC RANGE

PLEXI+ 3-year warranty
or Poly+ 6-year warranty

USES

- For control, surveillance, and safety, outdoors or indoors.
- Garage, building, and courtyard exits on private roads.
- Vehicle inspections at checkpoints, tollbooths, etc.
- Inspection of conveyors and concealed areas of machinery.



Universal fixing included



Wall fixing



Fixing on post

Back: 10-mm rigid expanded PVC (new design).

Seal: black PVC reinforced with steel staples. The mirror is held securely.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.



Warranty 3 YEAR PLEXI+
 Unbreakable
 Damage-proof
 Anti-UV treatment

Warranty 6 YEAR POLY+
 Vandal-proof
 Damage-proof
 Anti-UV treatment

Mirror dimensions (in mm)	Overall dimensions (in mm)	Max. dist. of observer from mirror (in metres)
½ Ø 300 mm	½ Ø 340 mm	3 meters
½ Ø 400 mm	½ Ø 440 mm	6 meters
½ Ø 600 mm	½ Ø 640 mm	8 meters
½ Ø 800 mm	½ Ø 840 mm	10 meters
½ Ø 900 mm	½ Ø 940 mm	12 meters

Catalogue No.	Unit price (excl. tax)
MICHATEL 307	
MICHATEL 407	
MICHATEL 607	
MICHATEL 807	
MICHATEL 907	

Catalogue No.	Unit price (excl. tax)
MICHATEL 309	
MICHATEL 409	
MICHATEL 609	
MICHATEL 809	
MICHATEL 909	



Fork



Extension

Accessories

Galvanised steel mounting post, diameter 60 mm, height 3.5 m	Catalogue No. P11
Galvanised steel mounting post, diameter 76 mm, height 4 m	Catalogue No. P19
Fixing extension for multipurpose mirror	Catalogue No. JNEX+
Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm	Catalogue No. FOURCHMIR



THERMOFORMING



MACHINING



PRINTING



ASSEMBLY

INDOOR MIRRORS

Hemisphere mirrors

3-year warranty – 90° and 180° view P. 32



Hemisphere mirrors

3-year warranty – 360° view P. 33



Standard range

3-year warranty – 90° view P. 34



Standard range magnet fixing

3-year warranty – 90° view P. 35



Qualimir range

6-year warranty P. 36



Tatoomir range

6-year warranty P. 37



Logistics range

3-year warranty – 90° view P. 38



Logistics range

3-year warranty – 180° view P. 39



Flat mirrors for precision inspection

6-year warranty P. 40



Flat mirrors for precision inspection

6-year warranty P. 41




Inspection mirror

3-year warranty – 90° view P. 42



Temporary worksite mirror

1-year warranty – 90° view P. 43



INDOOR HEMISPHERE MIRRORS

90° – 180° – 360° VIEW – MONITORING UP TO FOUR DIRECTIONS

Plexi+ 3-year warranty



**NEW OPTION
Magnet fixing**



USES


- Monitor store aisles and checkouts.
- Monitor warehousing and storage aisles.
- Traffic control in warehouses.



1/8 of a sphere



INFO
How to choose the right mirror
See page 02



90°

2-directional monitoring

Warranty 3 YEAR PLEXI+
Unbreakable – Damage-proof
Anti-UV treatment


Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 600 mm	6 metres
Ø 800 mm	8 metres
Ø 1000 mm	10 metres

Catalogue No.	Unit price (excl. tax)
90°60	
90°80	
90°100	

Accessories for the 90° mirror

Magnet fixing kit for 90° hemisphere mirror Catalogue No. KAH90

Perforated edges for screw-mounting directly to the wall or ceiling.



**NEW OPTION
Magnet fixing**



Warranty 3 YEAR PLEXI+

Unbreakable – Damage-proof
Anti-UV treatment



180°

3-directional monitoring

Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	6 metres	180°60	
Ø 800 mm	8 metres	180°80	
Ø 1000 mm	10 metres	180°100	



1/4 of a sphere

Accessories for the 180° mirror

Magnet fixing kit for 180° hemisphere mirror Catalogue No. KAH180


Plexi+ 3-year warranty

USES


- Monitor store aisles and checkouts.
- Monitor warehousing and storage aisles.
- Traffic control in warehouses.



NEW OPTION Magnet fixing

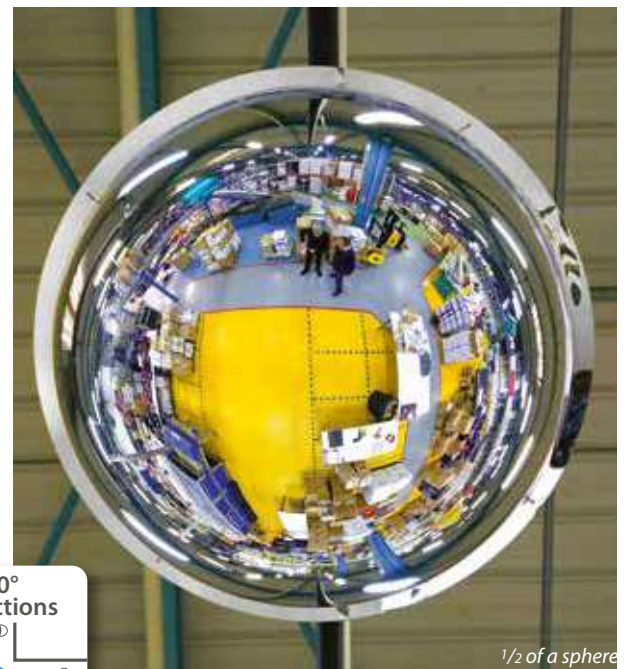

1/2 of a sphere



Perforated edges (4-mm diameter holes) for fixing directly to the ceiling or suspension from chains (optional).

Warranty
3 YEAR
PLEXI+

Unbreakable – Damage-proof
Anti-UV treatment

Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	6 meters	360°60	
Ø 800 mm	8 meters	360°80	
Ø 1000 mm	10 meters	360°100	
Ø 1200 mm	15 meters	360°120	



Suspension kit



Accessories for the 360° mirror

Suspension kit (5 x 1-m lengths of chain + set of 6 S-hooks)	Catalogue No. KCH
Steel chain – 25-metre roll – Load-bearing capacity 65 kg	Catalogue No. RCH
Set of 6 S-hooks	Catalogue No. ESSES
Magnet fixing kit for 360° hemisphere mirror	Catalogue No. KAH360

Unit price (excl. tax)

INDOOR MULTIPURPOSE MIRRORS


90° VIEW – 2-DIRECTIONAL MONITORING

Plexi+ 3-year warranty



USES

- Production control and monitoring.
- Deterrent add-on for video installations.
- Surveillance at checkouts and in aisles.
- Internal traffic amongst stock and reserves.



How to choose the right mirror
See page 04



Seal: black rubber.

Fixing: screw-on wall bracket.
Fully adjustable flexible metal arm.

Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 300 mm	4 meters
Ø 400 mm	6 meters
Ø 500 mm	8 meters
Ø 600 mm	12 meters
Ø 800 mm	20 meters
400 × 600 mm	10 meters
600 × 800 mm	20 meters


Warranty 3 YEAR PLEXI+

**Unbreakable – Damage-proof
Anti-UV treatment**


Catalogue No.	Unit price (excl. tax)
MULTIMIR 3007	
MULTIMIR 4007	
MULTIMIR 5007	
MULTIMIR 6007	
MULTIMIR 8007	
MULTIMIR 4607	
MULTIMIR 6807	

Safety mirror with magnetic arm for installation on cladding or rack

Plexi+ 3-year warranty

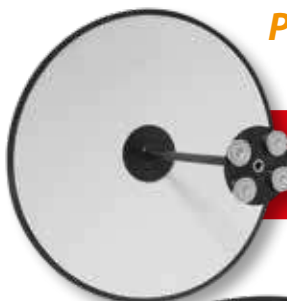

NEW RANGE
with magnet fixing



How to choose the right mirror
See page 04



Mirror dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 300 mm	4 meters
Ø 400 mm	6 meters
Ø 500 mm	8 meters
Ø 600 mm	12 meters
Ø 800 mm	20 meters
400 × 600 mm	10 meters
600 × 800 mm	20 meters

USES

- Production control and monitoring.
- Deterrent add-on for video installations.
- Surveillance at checkouts and in aisles.
- Internal traffic amongst stock and reserves.

Seal: black rubber.

Fixing: magnetic bracket. Fully adjustable flexible metal arm.



Unbreakable – Damage-proof
Anti-UV treatment – Magnet fixing

Catalogue No.	Unit price (excl. tax)
MULTIMIR 3007 KA	
MULTIMIR 4007 KA	
MULTIMIR 5007 KA	
MULTIMIR 6007 KA	
MULTIMIR 8007 KA	
MULTIMIR 4607 KA	
MULTIMIR 6807 KA	

Mobile base for multipurpose mirror

Compatible with all mirrors from the JPAG/SL/Multimir ranges.

USES

Lets you move the control mirror



Base dimensions (in mm)

610 × 1760 mm

Catalogue No.

AUTONOMIR

Unit price (excl. tax)



FULLY CUSTOMISABLE SAFETY MIRRORS

QUALIMIR mirrors are used to improve safety and signposting in companies.

*They are an essential supplement to the safety instructions.
Fully customisable. Please contact us to create your QUALIMIR.*

POLY+ 6-year warranty




NEW OPTION
Magnet wall fixing kit
Catalogue No. KAH



Vandal-proof
Damage-proof
Anti-UV treatment

Dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
280 × 360 mm	QUALIMIR 2836-9	
390 × 490 mm	QUALIMIR 3949-9	
400 × 600 mm	QUALIMIR 4060-9	
490 × 710 mm	QUALIMIR 4971-9	

Customise
WITH YOUR LOGO



NEW OPTION

Fixing kit



Accessories

- Wall fixing kit: 4 screws (3 × 13 mm), 4 nylon anchors (5 × 25 mm) and 4 chromium-plated brass screw covers Catalogue No. KIT9
- Magnet wall fixing kit Catalogue No. KAH
- Special double-sided adhesive for Qualimir mirrors – 50-m roll – 19 mm width – thickness 1 mm Catalogue No. 453450
- Fee for creating your visual Catalogue No. 00011
- Data processing costs Catalogue No. 00010

TATOOMIR mirrors are used to improve safety and signposting in companies.

POLY+ 6-year warranty



**An essential supplement to the safety instructions.
Fully customisable. Please contact us to create your TATOOMIR.**

1900 mm



Customise
WITH YOUR LOGO

Warranty 6 YEAR POLY+

**Vandal-proof
Damage-proof
Anti-UV treatment**

Dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
1900 x 850 mm	TATOOMIR 19085	

Accessories

Fee for creating your visual	Catalogue No. 00011
Data processing costs	Catalogue No. 00010


SAFETY AND CONTROL MIRRORS

90° – 180° VIEW

Plexi+ 3-year warranty

USES

- Warehouse traffic.
- Traffic of goods and people.
- Indoor access control.
- Reinforcement of visual safety and risk prevention.



INFO How to choose the right mirror
See page 04

NEW
Available with
in **RED** and **WHITE**

Universal fixing included



Frame: very lightweight and robust; made of aluminium composite.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)
Ø 400 mm	Ø 588 mm	6 meters
Ø 600 mm	Ø 788 mm	12 meters
Ø 800 mm	Ø 988 mm	20 meters
450 × 600 mm	638 × 788 mm	10 meters
600 × 800 mm	788 × 988 mm	20 meters

Warranty
3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

Catalogue No.	Unit price (excl. tax)
MAYA 4007	
MAYA 6007	
MAYA 8007	
MAYA 4607	
MAYA 6807	



Accessories


- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for traffic mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

FOR WAREHOUSES AND LOGISTICS

Plexi+ 3-year warranty

USES

- Warehouse traffic.
- Traffic of goods and people.
- Indoor access control.
- Reinforcement of visual safety and risk prevention.



MALEY

MIMALEY

NEW
Available with
in **RED** and **WHITE**

Universal fixing included




Wall fixing



Fixing on post

Frame: very lightweight and robust; made of aluminium composite.

Fixings: included in the price, this hardware can be used for mounting on posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.



Mirror dimensions	Frame dimensions	Max. dist. of observer from mirror	Catalogue No.	Unit price (excl. tax)
Ø 400 mm	Ø 588 mm	4 meters	MALEY 4007	
Ø 600 mm	Ø 788 mm	8 meters	MALEY 6007	
Ø 800 mm	Ø 988 mm	10 meters	MALEY 8007	
Ø 900 mm	Ø 1088 mm	12 meters	MALEY 9007	
½ Ø 400 mm	½ Ø 588 mm	4 meters	MIMALEY 4007	
½ Ø 600 mm	½ Ø 788 mm	8 meters	MIMALEY 6007	
½ Ø 800 mm	½ Ø 988 mm	10 meters	MIMALEY 8007	
½ Ø 900 mm	½ Ø 1088 mm	12 meters	MIMALEY 9007	

Warranty 3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment



Fork



Extension

Accessories

- Galvanised steel mounting post, diameter 60 mm, height 3.5 m Catalogue No. P11
- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

FLAT MIRRORS PRECISION INSPECTION IN INDUSTRY

CLASSIC RANGE

with universal fixing
POLY+ 6-year warranty

USES

- Precision inspection by industrial operators.
- Inspection of conveyors and concealed areas of machinery.



Universal fixing included



Flat mirror: no deformation – very clear view.

Back: 10-mm rigid expanded PVC.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
280 × 360 mm	330 × 410 mm	2 meters	MIRPLUS 2836	
390 × 490 mm	440 × 540 mm	4 meters	MIRPLUS 3949	
400 × 600 mm	450 × 650 mm	5 meters	MIRPLUS 4060	
490 × 710 mm	540 × 760 mm	8 meters	MIRPLUS 4971	

Other dimensions: contact us.

Warranty 6 YEAR POLY+
Vandal-proof
Damage-proof
Anti-UV treatment



Accessories

- Galvanised steel mounting post, diameter 60 mm, height 3.5 m Catalogue No. P11
- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR


CLASSIC RANGE

with universal fixing

POLY+ 6-year warranty

USES

- Precision inspection by industrial operators.
- Inspection of conveyors and concealed areas of machinery.

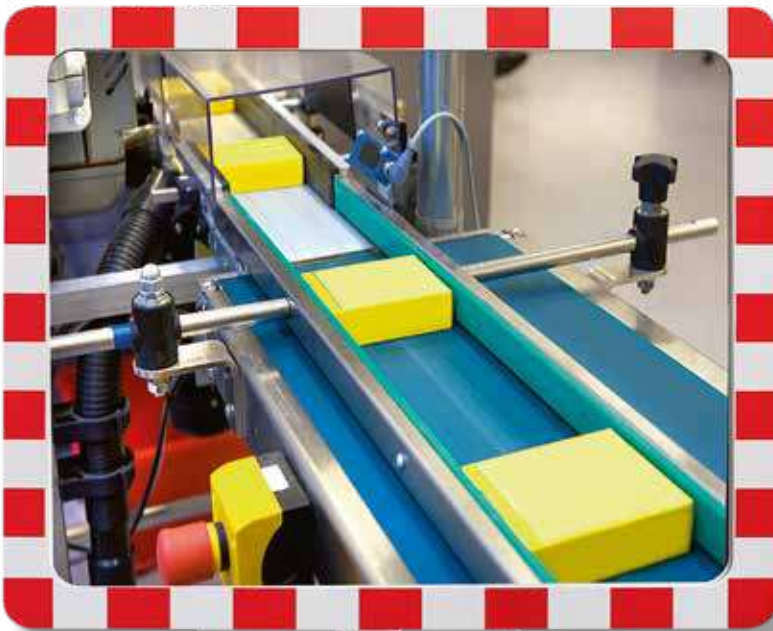

Universal fixing included



Flat mirror: no deformation – very clear view, with choice of two frame colours

Back: 10-mm rigid expanded PVC.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
280 × 360 mm	330 × 410 mm	2 metres	MIRPLUS 2836 NJ	
390 × 490 mm	440 × 540 mm	4 metres	MIRPLUS 3949 NJ	
400 × 600 mm	450 × 650 mm	5 metres	MIRPLUS 4060 NJ	
490 × 710 mm	540 × 760 mm	8 metres	MIRPLUS 4971 NJ	
280 × 360 mm	330 × 410 mm	2 metres	MIRPLUS 2836 RB	
390 × 490 mm	440 × 540 mm	4 metres	MIRPLUS 3949 RB	
400 × 600 mm	450 × 650 mm	5 metres	MIRPLUS 4060 RB	
490 × 710 mm	540 × 760 mm	8 metres	MIRPLUS 4971 RB	

Other dimensions: contact us.

Warranty
6 YEAR
POLY+

Vandal-proof
Damage-proof
Anti-UV treatment

Accessories

Galvanised steel mounting post, diameter 60 mm, height 3.5 m	Catalogue No. P11
Galvanised steel mounting post, diameter 76 mm, height 4 m	Catalogue No. P19
Fixing extension up to 20 cm for multipurpose mirror	Catalogue No. JNEX+
Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm	Catalogue No. FOURCHMIR

ROLLER-MOUNTED INSPECTION MIRRORS

Plexi+ 3-year warranty

USES

- For over- and under-vehicle inspection and surveillance.
- Used for anti-terrorism checks.



Back: galvanised steel.
Fitted with three castors (340 diameter model) or four castors (440 diameter model).

Seal: black PVC reinforced with steel staples.

Pole: aluminium with plastic grip handle.

Length: 1 metre.

Warranty
3 YEAR PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment



Lighting kit

Mirror dimensions
(in mm)

Ø 340 mm
Ø 440 mm

Specific feature

3 castors
4 castors

Catalogue No.

VIGIMIR 3007
VIGIMIR 4007

Unit price
(excl. tax)

Accessory

Lighting kit: torch + torch holder + belt ring

Catalogue No. KITECLAIRAGE


TEMPORARY WORKSITE MIRRORS

90° VIEW – 2-DIRECTIONAL MONITORING

DISCOVER THE NEW MIRTP RANGE

mirrors used to improve safety and signposting on worksites.

ECOCHOK: 1-year warranty



Universal fixing included



Frame: economical, made of 10-mm honeycomb polypropylene.

Reflector: virtually unbreakable Ecochok, 1-year warranty.

Digitally printed stripes and text.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Warranty 1 YEAR ECOCHOK
Virtually unbreakable
Anti-UV treatment

Mirror dimensions (in mm)	Frame dimensions (in mm)	Max. dist. of observer from mirror (in metres)	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	900 × 1200 mm	12 meters	MIRTP 6007-001 "DANGER!"	
Ø 600 mm	900 × 1200 mm	12 meters	MIRTP 6007-002 "GIVE WAY TO RIGHT"	
Ø 600 mm	900 × 1200 mm	12 meters	MIRTP 6007-003 "STOP"	
Ø 600 mm	900 × 1200 mm	12 meters	MIRTP 6007-PERSO "YOUR MESSAGE"	



Accessories

Galvanised steel mounting post, diameter 76 mm, height 4 m

Catalogue No. P19

Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm

Catalogue No. FOURCHMIR

UV PRINTING

UV PRINTING

TEXTILE PRINTING

TEXTILE PRINTING

SUBLIMATION

CUTTING

SEWING



SAFETY AND SIGNPOSTING SOLUTIONS

Aluminium poles

*Standard poles, poles with booms,
poles with anti-theft boxes*.....

P. 46



Windsock poles

Poles, windsocks, weathervanes.....

P. 48



ALUMINIUM POLES

The aluminium pole is the most cost-effective solution for your identity projects. It is not only economical and attractive, but also very easy to use, with a one- or two-piece white gloss design.

Standard poles

- Made of white gloss aluminium.
- Delivered as a complete assembly with fixed flat pommel, external halyard, and cleat.
- Two-piece poles are assembled using a coupling sleeve.



Appropriate flag for this type of pole: horizontal flag or vertical flag equipped with rings.



Height	Ø base / Ø top (mm)	Number of parts	Catalogue No.	Price (excl. tax)
6 m	60	1	0204.101	
6 m	60/60	2	0204.101-2PART	
7 m	60	1	0204.101-7M	
7 m	60/60	2	0204.101-7M-2P	
8 m	114/76	2	0204.102-114/76	
9 m	114/76	2	0204.103-114/76	
10 m	114/76	2	0204.104-114/76	

ADVANTAGES

- **Practical:** package length not exceeding 7 metres.
- **Environmentally friendly:** our aluminium poles are 100% recyclable.
- **Elegant:** our poles are made of a one-piece tube, with no welds or connectors.

Poles with boom

- Made of white gloss aluminium.
- Delivered as a complete assembly with pommel, rotating boom (max. length 1.20 m, diameter 36 mm), and counterweight to maintain downward tension on the vertical flag.



Appropriate flag for this type of pole: vertical banner equipped with a sheath at the top for the boom to be threaded through.



Height	Ø base / Ø top (mm)	Number of parts	Catalogue No.	Price (excl. tax)
6 m	60	1	0204.301	
6 m	60/60	2	0204.301-2PART	
7 m	60	1	0204.301-7M	
7 m	60/60	2	0204.301-7M-2P	
8 m	114/76	2	0204.302-114/76	
9 m	114/76	2	0204.303-114/76	
10 m	114/76	2	0204.304-114/76	

Accessories

Gloss coating option

- Aluminium tube (excluding accessories) painted according to our RAL colours.



Charcoal grey
RAL 7016



Green
RAL 6005



Blue
RAL 5005

	Catalogue No.	Price (excl. tax)
For 6-m pole	0204.800-6M	
For 8-m pole	0204.800-8M	
For 9-m pole	0204.800-9M	
For 10-m pole	0204.800-10M	



Burgundy
RAL 3004



Black
RAL 9005

Pommels

- Flat shape.
- Fixed PVC pommel.

Colour: black mounted as standard on poles.

Pommel	Catalogue No.	Price (excl. tax)
Black	0204.911	
White	0204.911-BLC	



ANTI-THEFT poles with box

- Made of white gloss aluminium.
- Delivered as a complete assembly with pommel, internal halyard, anti-theft box with lock and key, and counterweight to maintain downward tension on the flag.



Appropriate flag for this type of pole: horizontal flag or vertical flag equipped with rings.




Height	Ø base / Ø top (mm)	Number of parts	Catalogue No.	Price (excl. tax)
6 m	60	1	0204.201	
6 m	60/60	2	0204.201-2PART	
7 m	60	1	0204.201-7M	
7 m	60/60	2	0204.201-7M-2P	
8 m	114/76	2	0204.202-114/76	
9 m	114/76	2	0204.203-114/76	
10 m	114/76	2	0204.204-114/76	

Ground fixings

Sleeve

- Height 1.50 m, partially buried (50% underground, 50% above ground).
- Ideal for a permanent pole installation, without loss of height.
- The pole covers the tube coming out of the ground.



For pole with base diameter of 60 mm Price (excl. tax)


Catalogue No. 0204.902

For pole with base diameter of 114 mm Price (excl. tax)

Catalogue No. 0204.902-114

Sheath

- Height 75 cm, completely buried in the solid concrete.
- Supplied with a plug to hide the hole when pole is removed.
- Suitable for temporary installations, but with 75 cm loss of height.

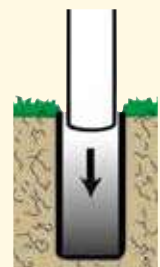

For pole with base diameter of 60 mm Price (excl. tax)

Catalogue No. 0204.901

For pole with base diameter of 114 mm Price (excl. tax)


Catalogue No. 0204.901-114

Patio bracket

Advantages: no earthworks or civil engineering required

Catalogue No. 0202.303

- Made of white gloss steel.
- Used to install a 60-mm diameter pole on a patio or on flat ground.
- Drilled square bracket, 250 × 250 mm, screw fitting directly into the ground (hardware not supplied).

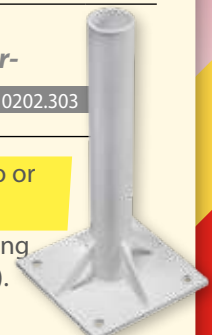


Technical characteristics:

- Outside diameter 70 mm – Inside diameter 64 mm
- Total height: 510 mm
- Four holes, diameter 9 mm – centre-to-centre distance 220 mm
- Approximate weight 7.5 kg

Catalogue No. 0204.914

Tilting base

- Ideal for poles with boom, for easy flag changes.
- Bracket delivered with anchoring brackets to be embedded in concrete.

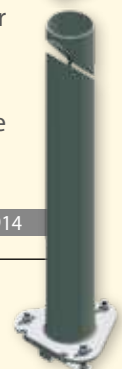

Accessories

Ring counterweight

- For poles with boom or with anti-theft box.



Catalogue No. 0209.105-ALU

Snap hooks

Steel – pair
Catalogue No. 0209.103

PVC – pair
Catalogue No. 0209.102



Halyard

- White halyard, diameter 5 mm.

10 metres
Catalogue No. 0209.101/10

100-m spool
Catalogue No. 0209.101/100



WINDSOCK POLES & WINDSOCKS


Windsocks

- Made of 115 g/m² polyester mesh.
- Three red stripes and two white stripes.
- Supplied with eyelets and clamps for attachment to a weathervane (optional, not supplied).

Contact us for: other colours or dimensions, customised printing with text and/or logo.

Catalogue No.	Total length (cm)	Base diameter (cm)	Tip diameter (cm)	Unit price (excl. tax)
0102.609-DIAM30-L100	100	30	14	
0102.609-DIAM30-L120	120	30	14	
0102.609-DIAM30-L180	180	30	12	
0102.609-DIAM40-L250	250	40	13	
0102.609-DIAM50-L225	225	50	13	
0102.609-DIAM60-L240	240	60	30	
0102.609-DIAM100-L450	450	100	25	

Price list according to standardised ICAO dimensions (International Civil Aviation Organization)

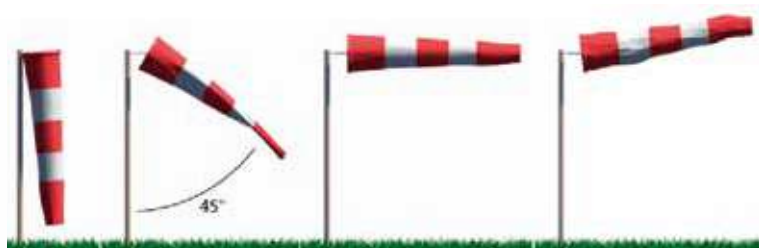

< 5 kt
< 9 km/h
> 46 km/h

approximately 10 kt
approximately 19 km/h

approximately 20 kt

> 25 kt
approximately 37 km/h



Pole & weathervane

- 3-, 4-, and 6-metre-tall poles, 60-mm diameter, one-piece aluminium construction.
- Supplied with weathervane at the top of the pole to attach the windsock (not supplied).
- Optional ground fixings.

Other heights: contact us.


Description	Catalogue No.	Unit price (excl. tax)
3-m pole + 30-mm diameter weathervane	0204.101-3M-AIR30	
4-m pole + 30-mm diameter weathervane	0204.101-4M-AIR30	
6-m pole + 60-mm diameter weathervane	0204.101-AIR60	



Ground fixings

Sleeve


- Height 1.50 m, partially buried (50% underground, 50% above ground).
- Ideal for a permanent pole installation, without loss of height.
- The pole covers the tube coming out of the ground.

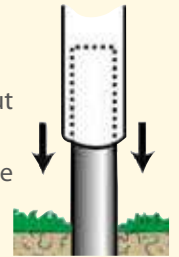

For pole with base diameter of 60 mm	Unit price (excl. tax)
Catalogue No. 0204.902	

Sheath

- Height 75 cm, completely buried in the solid concrete.
- Supplied with a plug to hide the hole when pole is removed.
- Suitable for temporary installations, but with 75 cm loss of height.

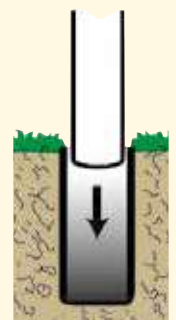

For pole with base diameter of 60 mm	Unit price (excl. tax)
Catalogue No. 0204.901	

Patio bracket

Advantages: no earthworks or civil engineering required

Catalogue No. 0202.303

- Made of white gloss steel.
- Used to install a 60-mm diameter pole on a patio or on flat ground.
- Drilled square bracket, 250 × 250 mm, screw fitting directly into the ground (hardware not supplied).




Technical characteristics:

- Outside diameter 70 mm – Inside diameter 64 mm
- Total height: 510 mm
- Four holes, diameter 9 mm, centre-to-centre distance 220 mm
- Approximate weight 7.5 kg

Tilting base

Catalogue No. 0204.914

- Ideal for poles with boom, for easy flag changes.
- Bracket delivered with anchoring brackets to be embedded in concrete.

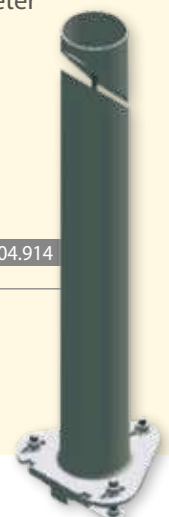

For non-standard dimensions and weights: shipping costs will vary – contact us



MACHINING



CUTTING



ASSEMBLY



PACKAGING

UNBREAKABLE MIRRORS FOR WASHROOMS AND AQUATIC FACILITIES

MPA unbreakable range

3-year warranty..... P. 52



MPA PVC unbreakable range

3-year warranty..... P. 53



MP EVO unbreakable range

3-year warranty..... P. 54



MP LUX unbreakable range

3-year warranty..... P. 56



Aquamir unbreakable range

90° view P. 58



Hydromir unbreakable range..... P. 59



FLAT MIRRORS FOR WASHROOMS

Plexi+ 3-year warranty



USES

These mirrors are particularly suitable for use in large communities :

prisons, hospitals, schools, sports facilities, or even fitting rooms.



Unbreakable mirrors for communal washrooms.

Essential for places where glass is prohibited or could create a potential hazard.



FRAMELESS MIRRORS

- Made of unbreakable Plexi+ (reinforced acrylic).
- Silvering made from vacuum-deposited pure (99.99%) aluminium.
- Silvering protected at the front by a 5-mm thickness of translucent Plexi+, and on the back by a polymerised acrylic varnish finish.
- Excellent optical quality.
- **Digital cut clean edges.**
- Finish: Four drill holes at the corners.
- **Fixing kit supplied.**

Warranty
3 YEAR PLEXI+

Unbreakable
Damage-proof – Anti-UV treatment

Mirror dimensions
(in mm)

Ø 490 mm

Ø 600 mm

400 × 400 mm

400 × 600 mm

600 × 800 mm

Catalogue No.

MPA 490-9SC

MPA 600-9SC

MPA 4040-9SC

MPA 4060-9SC

MPA 6080-9SC



Accessories

Special glue for Sanimir Plexi+ mirrors – 300-ml cartridge – to install 5 to 10 m² of mirror

Catalogue No. Hybrifix

Special double-sided adhesive for Sanimir Plexi+ mirrors – 50-m roll – 19 mm width – thickness 1

Catalogue No. 453450

Antistatic cleaner for Sanimir Plexi+ mirrors – 1-litre bottle

Catalogue No. 029008

Plexi+ 3-year warranty



USES

These mirrors are particularly suitable for use in large communities :

prisons, hospitals, schools, sports facilities, or even fitting rooms.

**WE MANUFACTURE ON REQUEST
WITH MINIMUM ORDER QUANTITY**

Unbreakable mirrors with 20-mm thick rigid expanded PVC casing for communal washrooms.

Essential for places where glass is prohibited or could create a potential hazard.



Characteristics of the PVC frame:

- 20-mm thick rigid expanded PVC casing
- Fixing kit supplied



Warranty
3 YEAR
PLEXI+
Unbreakable
Damage-proof
Anti-UV treatment

MIRRORS WITH PVC FRAME

- Made of unbreakable Plexi+ (reinforced acrylic).
- Silvering made from vacuum-deposited pure (99.99%) aluminium.
- Silvering protected at the front by a 5-mm thickness of translucent Plexi+, and on the back by a polymerised acrylic varnish finish.
- Excellent optical quality.

Mirror dimensions
(in mm)

400 × 600 mm

600 × 800 mm

400 × 1200 mm

Catalogue No.

MPA 4060-9PVC

MPA 6080-9PVC

MPA 40120-9PVC

Cleaner



Accessory

Antistatic cleaner for Sanimir Plexi+ mirrors – 1-litre bottle

Catalogue No.
029008

FLAT MIRRORS FOR WASHROOMS


Plexi+ 3-year warranty

USES

- For washrooms in schools, colleges, government offices, cinemas, swimming pools, etc.
- Hotel bathrooms, bed & breakfast, etc.
- Changing rooms and other public places.



NEW



Frame: 10-mm rigid expanded PVC.

Reflector: PLEXI+: highly robust, ruggedized, damage-proof. 3-year warranty.

Fixing: Hardware kit for wall fixing supplied.

Warranty
3 YEAR PLEXI+

**Unbreakable
Damage-proof
Anti-UV treatment**

Mirror dimensions (in mm)

Bathroom mirror 280 × 360 mm with white PCV frame – 320 × 400 mm

Bathroom mirror 390 × 490 mm with white PCV frame – 430 × 530 mm

Bathroom mirror 490 × 710 mm with white PCV frame – 530 × 750 mm

Catalogue
No.

MP43 EVO

MP54 EVO

MP75 EVO



Cleaner



Accessory

Antistatic cleaner for Sanimir Plexi+ mirrors – 1-litre bottle

Catalogue No. 029008

A FEW SUGGESTIONS FOR MP EVO CUSTOMISATION



FLAT MIRRORS FOR WASHROOMS

Plexi+ 3-year warranty



USES

- For washrooms in schools, colleges, government offices, cinemas, swimming pools, etc.
- Hotel bathrooms, bed & breakfast, etc.
- Changing rooms and other public places.



NEW



Frame: wood fibre stained with low-formaldehyde resin; comes in several colours.

Reflector: PLEXI+: highly robust, ruggedized, damage-proof. 3-year warranty.

Fixing: wall fixing included.



Simplified wall fixing

Choice of colours



Warranty
3 YEAR
PLEXI+

Unbreakable – Damage-proof
Anti-UV treatment

Mirror dimensions	Frame dimensions	Catalogue No.
280 x 360 mm	366 x 466 mm	MP43 LUX
390 x 490 mm	461 x 561 mm	MP54 LUX
490 x 710 mm	601 x 852 mm	MP75 LUX



Cleaner

Accessory

Antistatic cleaner for Sanimir Plexi+ mirrors – 1-litre bottle

Catalogue No. 029008




**A FEW SUGGESTIONS FOR
MP/LUX CUSTOMISATION**



SURVEILLANCE AND MOTOR COORDINATION MIRRORS

AQUAMIR stainless steel pool surveillance mirrors

Resistant to aggressive, chlorinated environments.



USES

- Water parks, pools, sports clubs, amusement parks, seaside, etc.



COMPLETE STAINLESS STEEL



STAINLESS STEEL REFLECTOR

Universal fixing included



Back: galvanised steel.

Reflector: vandal-proof polished stainless steel. Damage-proof, highly resistant to aggressive, chlorinated environments.

Seal: black PVC reinforced with steel staples.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

INOX POLI STANDARD

Mirror dimensions (in mm)	Max. dist. of observer	Catalogue No.	Unit price (excl. tax)
Ø 600 mm	12 meters	AQUAMIR 6008	
Ø 800 mm	20 meters	AQUAMIR 8008	
450 x 600 mm	10 meters	AQUAMIR 4608	
600 x 800 mm	25 meters	AQUAMIR 6808	
800 x 1000 mm	35 meters	AQUAMIR 81008	

Other dimensions: contact us.

INOXTI

INOX POLI ALL STAINLESS STEEL

NEW VERSIONS
stainless steel reflector + stainless steel back + stainless steel hardware

Catalogue No.	Unit price (excl. tax)
AQUAMIR 6008 TI	
AQUAMIR 8008 TI	
AQUAMIR 4608 TI	
AQUAMIR 6808 TI	
AQUAMIR 81008 TI	




Accessories

- Galvanised steel mounting post, diameter 60 mm, height 3.5 m Catalogue No. P11
- Galvanised steel mounting post, diameter 76 mm, height 4 m Catalogue No. P19
- Fixing extension for multipurpose mirror Catalogue No. JNEX+
- Fork to mount two mirrors on a post with section of dimensions 60 to 90 mm Catalogue No. FOURCHMIR

Pool surveillance mirrors MESSAGE AQUAMIR

Resistant to aggressive, chlorinated environments.



USES

- Water parks, pools, sports clubs, amusement parks, seaside, etc.



Back: 10-mm rigid expanded PVC.

Reflector: vandal-proof polished stainless steel. Damage-proof, highly resistant to aggressive, chlorinated environments.

Fixings: included in the price, this hardware can be used for mounting on all posts, whether round, rectangular, or square, with a cross-section of dimensions 60 to 90 mm, or directly on a wall.

Universal fixing included



Mirror dimensions (in mm)	Max. dist. of observer	Catalogue No.	Unit price (excl. tax)
600 × 800 mm	25 meters	AQUAMIR 6808-001 "NO DIVING"	
600 × 800 mm	25 meters	AQUAMIR 6808-002 "NO PUSHING"	
600 × 800 mm	25 meters	AQUAMIR 6808-003 "DEPTH 2 M"	
600 × 800 mm	25 meters	AQUAMIR 6808-00PERSO "CUSTOMISED"	



INOX POLI STANDARD

HYDROMIR motor coordination mirror for aquatic environments.

Resistant to aggressive, chlorinated environments.
Developing motor coordination under water.



USES

- Water parks, pools, seaside, etc.



Characteristics

- Made of 5-mm thick Plexi+
- Chlorine-resistant – Special sea and pool lamination on the back of the mirror:
 - 48-hour water immersion test: no adverse effects
 - 1-year seawater immersion test (with tides): no adverse effects
 - 120-hour moisture resistance test: no adverse effects
 - Temperature test: -50 °C +108 °C: no adverse effects
- Dimensions: 400 × 600 mm
- Digital cut straight edges, rounded corners
- 2 handles to hold the mirror in the water



Mirror dimensions (in mm)	Catalogue No.	Unit price (excl. tax)
400 × 600 mm	HYDROMIR4060-P	

Discover an avalanche of innovations



Jura road – P 12-13



Citymir R – P 14



Panoramir – P 14



Citymir V – P 15



Citymir V-Jura – P 15



Infomir – P 18



Jura multipurpose – P 26-27



Autonomir – P 35



Tatoomir – P 37



Flagpoles
P 46-47



MP Lux – P 56



Message Aquamir – P 59

**More than 200 models available as standard
→ Special custom designs on request**

Kaptôrama products are distributed by: