




PANORAMIC MIRROR

FOR CONTROL AND MONITORING IN INDUSTRIAL ENVIRONMENTS

APPLICATIONS

Panoramic control and surveillance of parking lot exits, carriage entrances, etc.
For construction machinery: allows you to see behind the driver and in blind spots



MIRROR

FRAME EDGE

In 10 mm thick anti-vandal rigid expanded PVC.

REFLECTOR

PLEXI+ very robust, very resistant, non-deformable, guaranteed 3 years

Reflector size: 1/2 diameter 400 mm
Total dimension: 1/2 diameter 440 mm

Maximum distance from the observer to the mirror: 6 meters

VISION

180° vision - 3-way control

PACKAGING

Packaging dimensions: L. 410 x D. 310 x H 240 mm
Net weight (mirror only): 2kg
Gross weight (with packaging): 2.4 kg

Garantie **3 ANS** PLEXI+




FIXATION

FIXATION

Included with the mirror. It can be mounted on any pole with a cross section of 60 to 90 mm or directly on the wall.

wall mounting

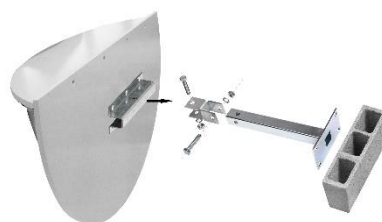

Pole Mounting

