



## PANORAMIC MIRROR

FOR CONTROL AND MONITORING IN INDUSTRIAL ENVIRONMENTS

### APPLICATIONS

Panoramic control and surveillance of parking lot exits, carriage entrances, etc.  
For construction machinery: allows you to see behind the driver and in blind spots



### MIRROR

#### FRAME EDGE

In 10 mm thick anti-vandal rigid expanded PVC.

#### REFLECTOR

POLY+ unbreakable, very resistant, non-deformable  
6 years warranty

Reflector size: 1/2 diameter 400 mm  
Total dimension: 1/2 diameter 440 mm

Maximum distance from the observer to the mirror: 6 meters

#### VISION

180° vision - 3-way control

#### PACKAGING

Packaging dimensions: L. 410 x D. 310 x H 240 mm  
Net weight (mirror only): 2kg  
Gross weight (with packaging): 2.4 kg




### FIXATION

#### FIXATION

Included with the mirror. It can be mounted on any pole with a cross section of 60 to 90 mm or directly on the wall.

#### wall mounting

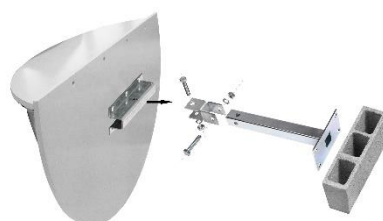

#### Pole Mounting

